

SDL Series

01
FEATURE

Available to large size wafer & FPD

Large capacity available by combination.
Larger than 150kL/min also available on demand.

02
FEATURE

Shorter cycle-time

Large capacity around atm. pressure can achieve high speed pumping best for large L/L chamber.



Major products


i Pumps for solvent evacuation are also lined-up

Spec. / Products	SDL12E50	SDL20E50	SDL36E60	SDL3600
Max. pumping speed [L/min] *1	25,000	40,000	60,000	60,000
Back pump max. pumping speed [L/min] *1	8,000	8,000	10,000	12,500
Ultimate pressure [Pa] *1	0.8			
Supply voltage (50/60Hz)	3Ph AC200-220V, 380-440V			
Dimensions [mm] L×W×H	1000×520×1050	1370×850×1295		1370×600×1295
Mass [kg]	645	800	920	950

*1) Without N₂ purge. * Contact us about international standard compliance. Spec. & name of products are subject to change without prior notice.

* Other pump models may be considered depending on the configuration. Please contact our sales representative for details.

S-P Curve

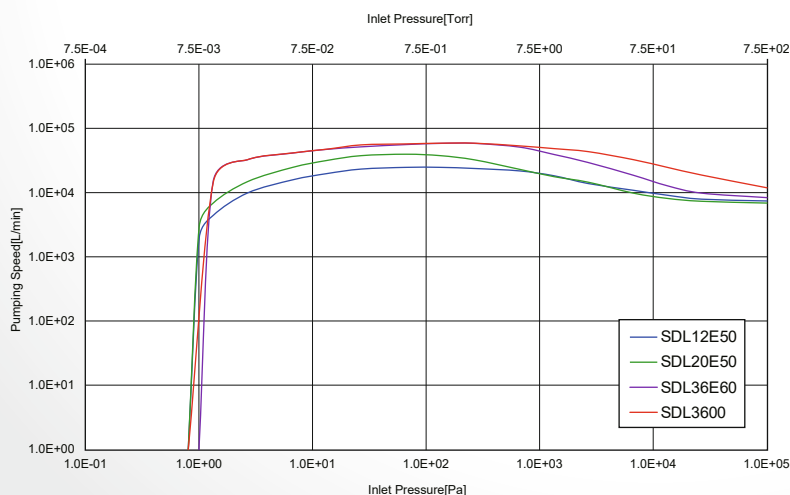

Contact

Kashiyama Industries, Ltd.

🌐 <https://www.kashiyama.com/>

Head Office

Japan 📞 (+81)267-67-9009

FAX (+81)267-67-9015

✉ sales@kashiyama.co.jp

USA 📞 (+1)510-979-0070

✉ sales@kashiyama.com

Korea 📞 (+82)31-678-1500

China 📞 (+86)21-3895-4599

Taiwan 📞 (+886)4-2462-9599