

- "More than" Low Power -

# MU-PE/HE Series

High Temp., More Purge

Smallest Power Consumption for Process by roots

## Process Durability

## Power Consumption 0.6kW

**01**  
FEATURE  
Energy-saving performance has evolved even further!!

**02**  
FEATURE  
Applicable to wide range of process from light to medium duty. \*1

**03**  
FEATURE  
Hot N2 purge available to enhance process durability. [MU-HE Series]



## Major Products


仕様 / 型式	MU100PE/HE	MU300PE/HE	MU600PE/HE
Max. pumping speed [L/min] *2 *6	1,660	5,000	10,000
Ultimate pressure [Pa] *2	3.0	0.5	
Supply voltage (50/60Hz)	3Phase AC200-220V *3		
Power consumption [kW] *4	0.6	0.8	0.85
Dimensions [mm] L×W×H *5	630×350×360	630×350×520	
Mass [kg]	70	110	130

\*1) Contact us about application beforehand. \*2) Data without heater nor N2 purge \*3) Contact us for other voltage options.

\*4) Approx. value at ultimate pressure. +0.2kW with Hot N<sub>2</sub> purge. \*5) Package size. \*6)The maximum pumping speed is an approximate value.

\* Contact us about large capacity pumps.

## S-P Curve

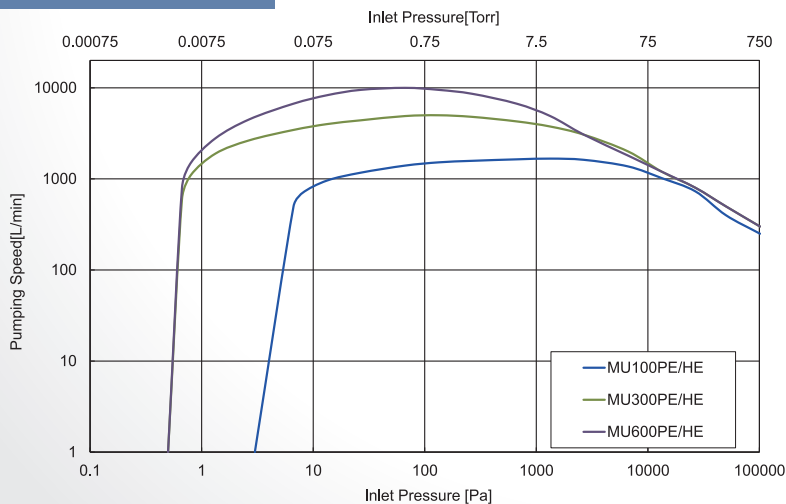

○Specifications and model names are subject to change without prior notice.

○Products displayed in this catalog must be approved for export in accordance with the Foreign Exchange and Foreign Trade Control Act. Before placing an export order, please contact our Sales Department.

## Contact

### Kashiyama Industries, Ltd.

🌐 <https://www.kashiyama.com/>

Head Office

Japan ☎ (+81)267-67-9009

FAX (+81)267-67-9015

✉ sales@kashiyama.co.jp

USA ☎ (+1)510-979-0070

✉ sales@kashiyama.com

Korea ☎ (+82)31-678-1500

China ☎ (+86)21-3895-4599

Taiwan ☎ (+886)4-2462-9599